





Filtration and separation technology

Lenzing ViscoFil – Automatic backwash filter

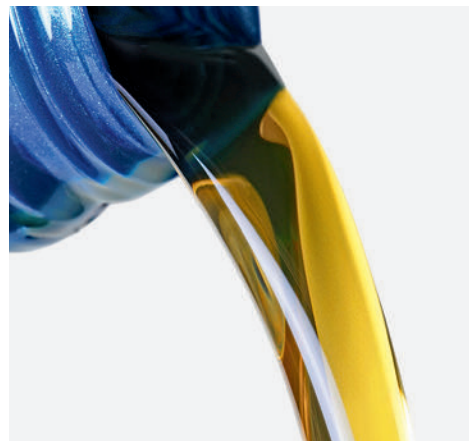

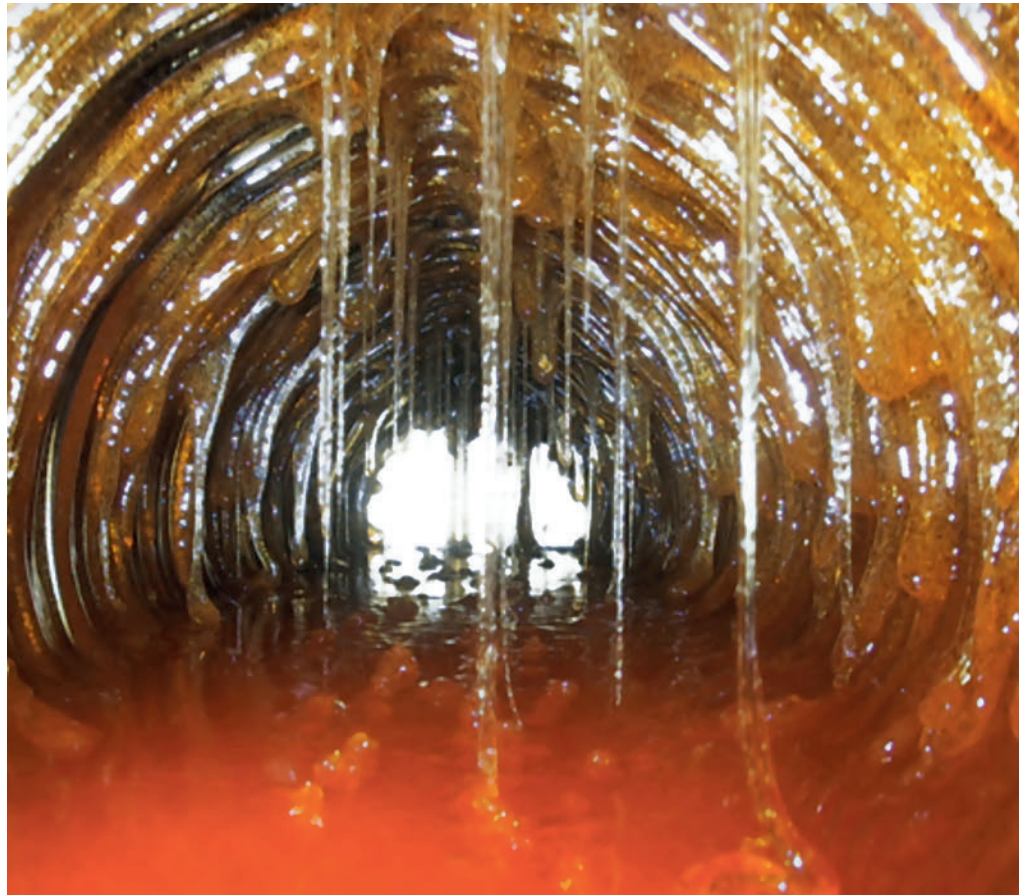

Lenzing ViscoFil

Automatic backwash filter – filtration down to 3 µm

The ViscoFil-system is a fully automatic, continuous system according to the principle of depth filtration. A metal fiber fabric is used for filter material which retains particles of different sizes and shapes due to its depth effect. After the pre-determined degree of contamination has been reached, the filter material is cleaned by backwashing a small quantity of filtered medium, filtration continues during backwashing.

Features

- Filter fineness 3 µm to 100 µm
- Excellent retention of gel particles
- Free of dead space
- High solid content compared to other common automatic filtration systems
- High flow rates
- Highest filtration efficiency
- Partial backwash during filtration
- Minimum losses due to patented regeneration system
- Low operation and maintenance costs
- Sizes for virtually all flow rates available
- Filters designed for operation pressure of 16 and 25 bar - higher pressures are possible upon request
- Space-saving plant setup and maintenance area
- Completely closed system

Markets

- Fiber industry
- Foil industry
- Chemical industry
- Petrochemistry
- Foodstuffs industry

Fluids

Spinning solutions:

Viscose, polyacryl, polyimide, cellulose acetat, spandex, aramid

High viscose media:

Resins, varnish, petrochemical products

Food and beverage:

Soft cheese, honey, syrup, gelatine




Functional principle

Lenzing ViscoFil is a fully automatic filtration system


Filtration

The unfiltered fluid is transported into room P1 through inlet by means of the feed pump. Separation of particles out of the liquid occurs while the unfiltered fluid goes from room P1 into room P2, between these both chambers the filter material is installed on a perforated drum.

The filtered fluid is discharged through outlet, and goes to the P2-pressure equalizing tank, spin tank or P2-control valve. The blockage of the filter material causes a steadily increasing differential pressure ΔP between room P1 and room P2. This increase of the differential pressure is analysed by an SPS control system. After reaching a preselected differential pressure, the backflushing will be started.

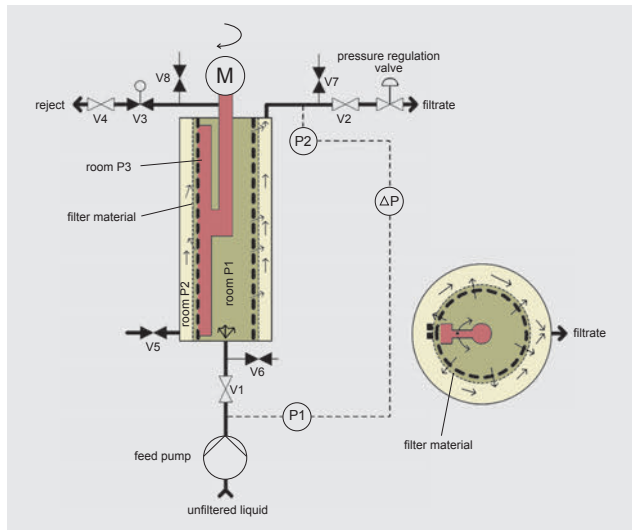

Status „Filtration“

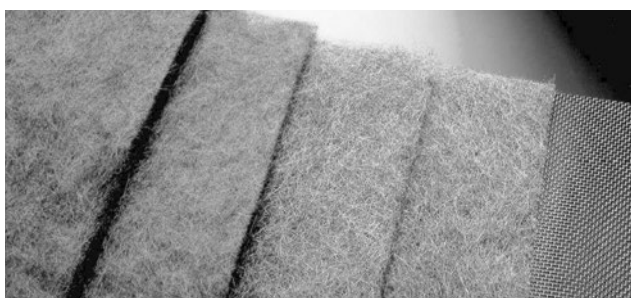


Stainless steel fleece for depth filtration

Backwashing

After the maximum degree of contamination has been reached, the total surface of the filter material is cleaned by a backwash procedure. This takes place by one rotation (360°) of the backwash device. The channel – shaped openings in the backwash strip, which seals to the inside surface of the perforated drum (carrier of the filter material) – executes the backwash of the minimum quantity of backwash liquid (filtrate), which is necessary to rinse the filter material free from impurities.

After having cleaned the whole surface the backwash device remains in the waiting position until the differential pressure reaches the preselected value.

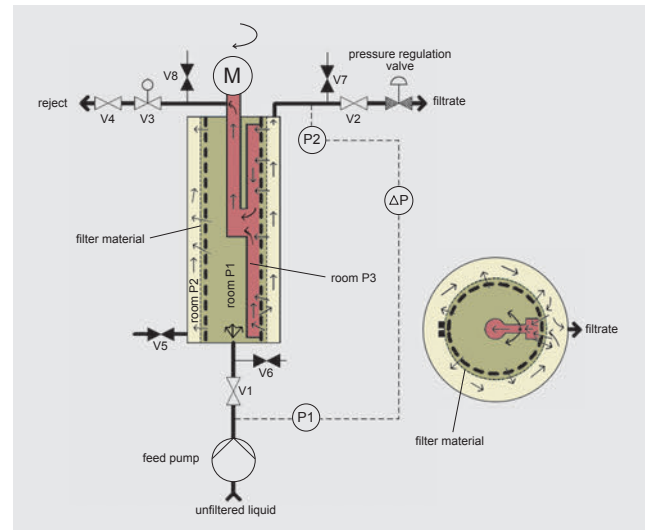

Status „Backwashing“


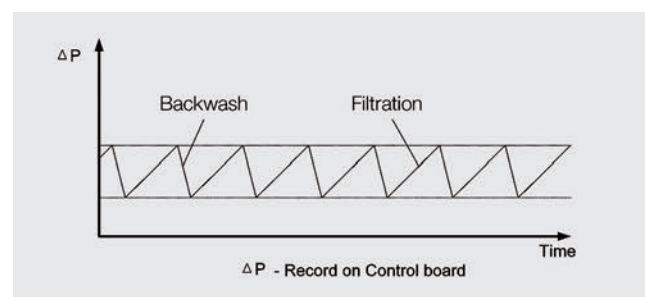


Chart - differential pressure


Design / construction type

ViscoFil is available in different sizes

ViscoFil 0,2 / 0,5

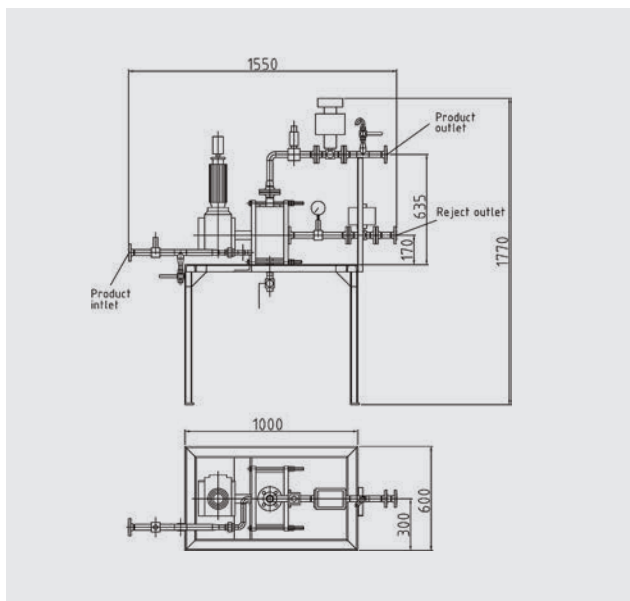

ViscoFil 5

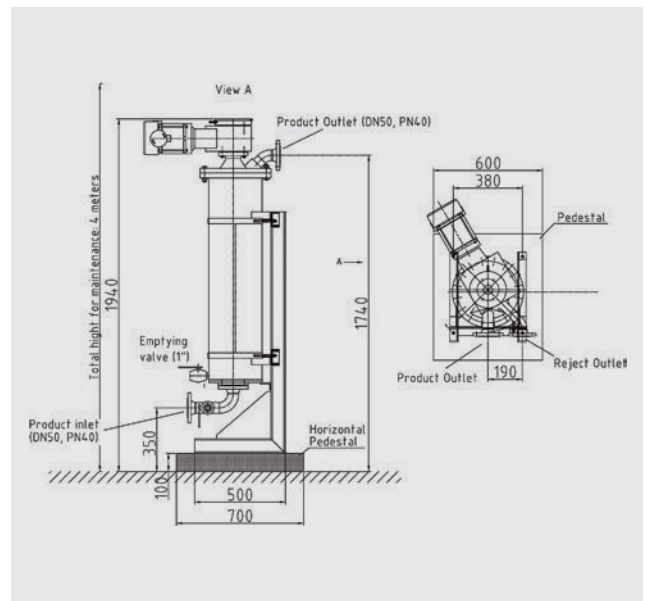

ViscoFil 0,5



ViscoFil 5

Design / construction type

	from	to
flow rate	10 l/h	100 m³/h
fineness of filtration	3 µm	100 µm
flange dimensions	DN25	DN80
design pressure	16 bar	25 bar
design temperature	0 °C	120 °C
range of application	filtration for low viscose fluids	

Fabrication material


Carbon steel, Stainless steel AISI 316Ti/L (1.4404, 1.4571), AISI 904L (1.4539)

Gaskets

EPDM, Silicone, Buna, Viton, PTFE



ViscoFil 10




Filtration and separation technology

Phone: +43 (0) 7672 701-3479

Fax: +43 (0) 7672 918-3479

E-mail: filter-tech@lenzing.com

Automatic backwash filters ■ Cake filtration ■ Microflotation ■ Precoat filtration ■ Filter housings
Filter elements ■ Filter bags




Automation

Phone: +43 (0) 7672 701-2250

Fax: +43 (0) 7672 918-2250

E-mail: automation@lenzing.com




Sheet metal technology

Phone: +43 (0) 7672 701-3998

Fax: +43 (0) 7672 918-3998

E-mail: blechtechnik@lenzing.com




Mechanical construction

Phone: +43 (0) 7672 701-2345

Fax: +43 (0) 7672 918-2345

E-mail: mech-eng@lenzing.com




Industrial services

Phone: +43 (0) 7672 701-2345

Fax: +43 (0) 7672 918-2345

E-mail: mech-eng@lenzing.com



Mechatronics

Phone: +43 (0) 7672 701-3048

Fax: +43 (0) 7672 701-3745

E-mail: mechatronics@lenzing.com



Environmental technology

Phone: +43 (0) 7672 701-2378

Fax: +43 (0) 7672 918-2378

E-mail: umwelt-tech@lenzing.com




Pulp technology

Phone: +43 (0) 7672 701-3409

Fax: +43 (0) 7672 918-3409

E-mail: pulp-tech@lenzing.com



Viscose and fiber technology

Phone: +43 (0) 7672 701-2378

Fax: +43 (0) 7672 918-2378

E-mail: fiber-tech@lenzing.com